

# MOTOBATT

**QuadFlex™ Battery**  
**WWW.MOTOBATT.COM**  
**MBTX24U**



## Features

- Patented Quad Terminal Design - Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

## Performance Specifications

**Nominal Voltage** ----- 12 volts (6 cells)

### Nominal Capacity

20-hr. (1.25A to 10.50 volts)	-----	26AH
10-hr. (2.50A to 10.50 volts)	-----	25.0AH
5-hr. (5.0A to 10.20 volts)	-----	21.3 AH
1C. (25.0A to 9.6 volts)	-----	41Min (16.8AH)
8C. (200A to 6.00 volts)	-----	3Min (10AH)

**Approximate Weight** ----- 16.1 lbs. ( 7.30kg)

**Energy Density** (20-hr. rate) ----- 1.77W-h/in<sup>3</sup> (108 W-h/l)

**Specific Energy** (20-hr. rate) ----- 19.2W-h/lb (42.3 W-h/kg)

**Internal Resistance** (approx) ----- 14 milliohms

**CCA** (-0.4°F/-18°C,7.2V,30S)----- 285 amperes

**CA** (68°F/20°C,7.2V,30S)----- 350 amperes

**Shelf Life** (% of nomomal capacityat 68°F (20°C)----- SOC% OCV

1 Months	-----	97%	12.78V
3 Months	-----	91%	12.7V
6 Months	-----	83%	12.5V

### Operating Temperature Range

Charge	-----	-4°F(-20°C) to 122°F(50°C)
Discharge	-----	-40°F (-40°C) to 140°F(60°C)

**Case** ----- ABS

**Carton Contents** -----1-MotoBatt MBTX24U Battery,  
 Fit spacers (1 bottom),4 stainless steel terminal screws, 2 brass terminals, 4mm Allen Wrench, Install / user manual.




RETAIL CARTON




C\* TERMINAL    TERMINAL COVER    SCREW    WRENCH

## Brass Terminals (mm)

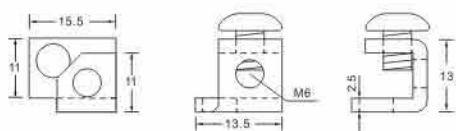

Terminal Screws: Stainless, M6 Thread  
 Fastener: 4mm Allen Hex


## Physical Dimensions: (in./mm)

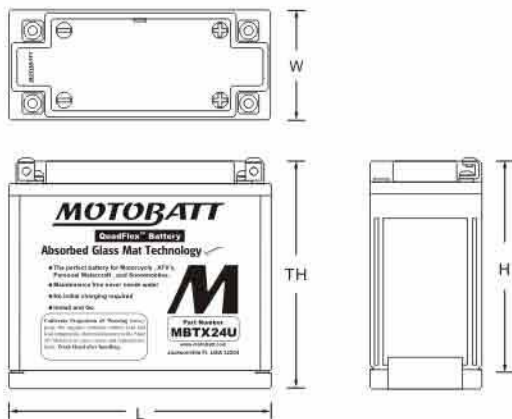


**L:8.07(205)    W:3.43(87)    H:6.38(162)**  
**TH:.6.93(176)**

Tolerances are +/0.04in.(+/-1mm) and +/0.08in.(+/-2mm) for height dimensions.


## Shelf life & Storage

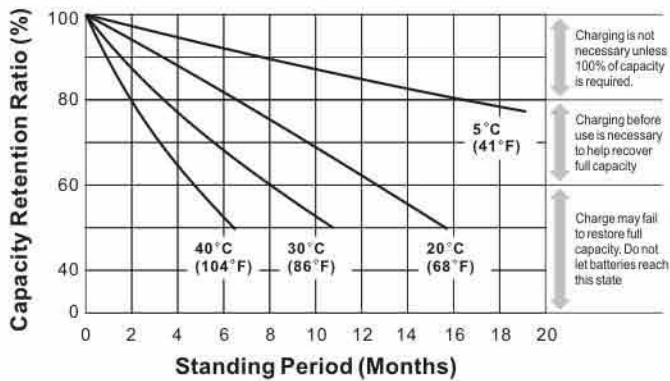


## Discharge Characteristics

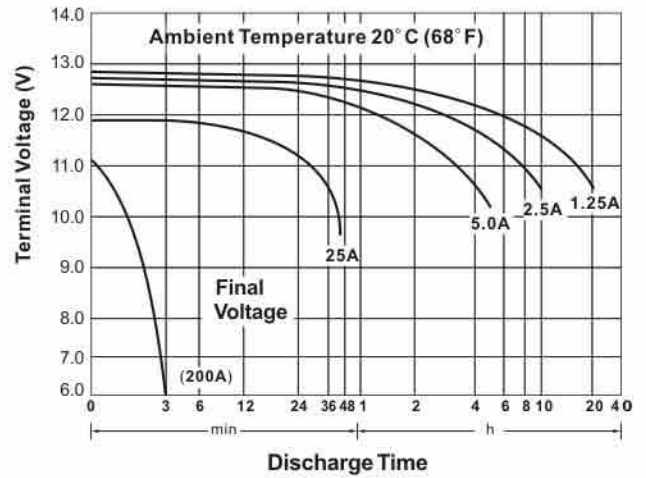

## Discharge Time vs. Discharge Current

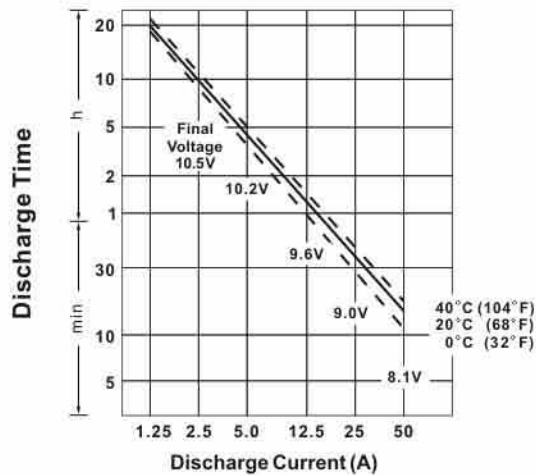

## Life Characteristics in Cyclic Use

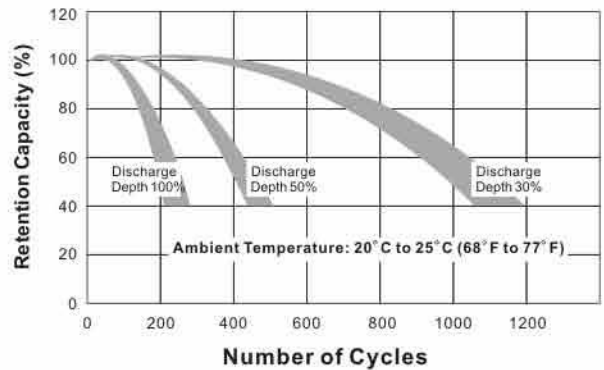

## Charging

**Cycle Applications:** limit initial current to 7.5A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 500mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

## Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 4A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at [www.motobatt.com](http://www.motobatt.com).

## Can be used to replace

12N183	12N183A	Y50N18AA	Y50N18LA
Y50N18LA2	Y50N18LA3	Y50N18LACX	SY50N18LA
SY50N18LAT	YTX24HLBS	YTX24HL	

## Further Information

Please refer to our website [www.motobatt.com](http://www.motobatt.com) to locate a distributor in your area.