

MOTOBATT

QuadFlex™ Battery
 WWW.MOTOBATT.COM
 MBTX16U



Features

- Patented Quad Terminal Design - Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

Performance Specifications

Nominal Voltage	12 volts (6 cells)
Nominal Capacity	
20-hr. (0.95A to 10.50 volts)-----	19.6AH
10-hr. (1.9A to 10.50 volts)-----	19.0AH
5-hr. (3.8A to 10.20 volts)-----	16.1AH
1C. (19.0A to 9.6 volts)-----	43Min (13.6AH)
8C. (152A to 6.00 volts)-----	3Min (7.6AH)
Approximate Weight	12.46 lbs. (5.65kg)
Energy Density (20-hr. rate)	1.82W-h/in ³ (111.2 W-h/l)
Specific Energy (20-hr. rate)	18.88W-h/lb (41.63 W-h/kg)
Internal Resistance (approx)	18 milliohms
CCA (-0.4°F/-18°C,7.2V,30S)-----	250 amperes
CA (68°F/20°C,7.2V,30S)-----	310 amperes
Shelf Life (% of nominal capacity at 68°F (20°C)----	SOC% OCV
1 Month	97% 12.78V
3 Months	91% 12.7V
6 Months	83% 12.5V

Operating Temperature Range

Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-40°F (-40°C) to 140°F (60°C)

Case

Carton Contents

1-MotoBatt MBTX16U Battery,
 4 stainless steel terminal screws, 2 brass terminals, 4mm Allen Wrench, Install / user manual.




RETAIL CARTON




"C" TERMINAL TERMINAL COVER SCREW WRENCH

Brass Terminals (mm)

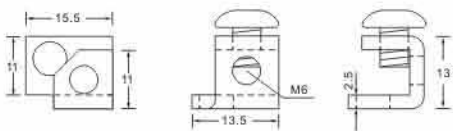

Terminal Screws: Stainless, M6 Thread
 Fastener: 4mm Allen Hex

Physical Dimensions: (in./mm)

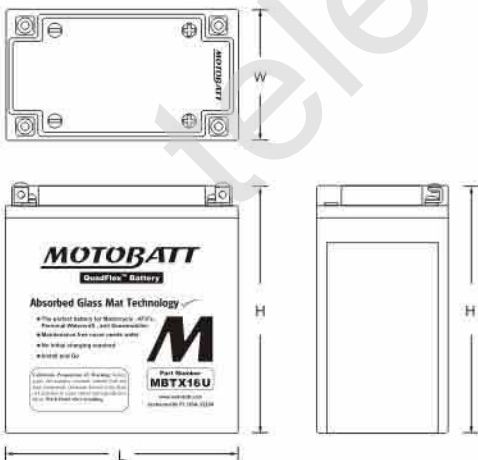


L: 5.94(151) W: 3.43(87) H: 6.34(161)

Tolerances are +/0.04in.(+/1mm) and +/0.08in.(+/2mm) for height dimensions.


Shelf life & Storage




Discharge Characteristics

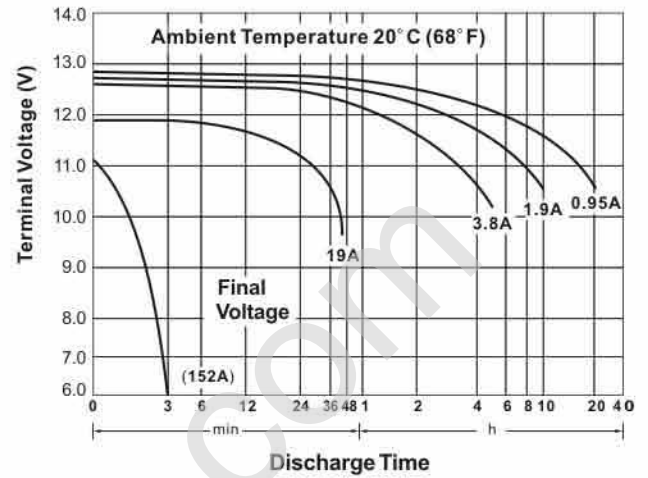

Discharge Time vs. Discharge Current

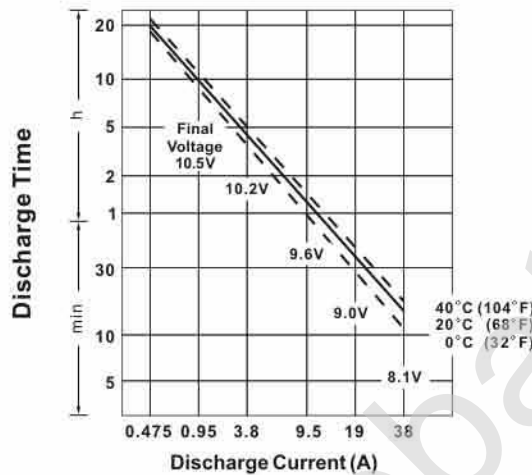

Life Characteristics in Cyclic Use

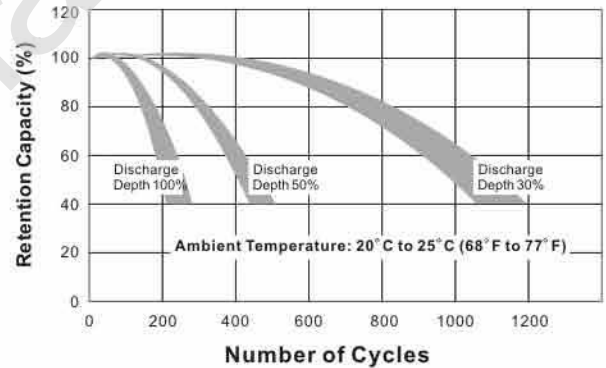

Charging

Cycle Applications: limit initial current to 5.7A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 380mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 4A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com.

Can be used to replace

YTX16BS	YTX16BS1	YTX20CHBS	

Further Information

Please refer to our website www.motobatt.com to locate a distributor in your area.