

DC35-12A DATA SHEET



DC35-12A

35AH@20HR

12-Volt

DEEP CYCLE

Maintenance-Free
Sealed AGM Battery





| Nominal Specifications | | | |
|---------------------------|-----------------------|----------------|-----------|
| Battery Model | DC35-12A | Rated Capacity | 35AH/20HR |
| Mechanical Specifications | | | |
| Group Size | U1 | | |
| Overall Height (H) | 167±2mm | 6.57" | |
| Container Height (h) | 155±2mm | 6.10" | |
| Length | 196±2mm | 7.72" | |
| Width | 131±2mm | 5.16" | |
| Weight | Approx.11.2kg | 24.69lbs. | |
| Terminal Type | M6- Button Terminal | | |
| Terminal Torque | 5.6-7.9 N.m | | |
| Container Material | ABS Standard UL 94-HB | | |

| Electrical Specifications | |
|---------------------------|------------|
| C100 | 39AH |
| C20 | 35AH |
| C10 | 32AH |
| C5 | 29.0AH |
| CCA | 190A |
| CA or MCA | 230A |
| HPCA | 270A |
| Max. Discharge Current | 450A (5s) |
| Internal Resistance | 5.5mΩ |
| Reserve Capacity | |
| Reserve @25 AMPS | 52 Minutes |
| Reserve @75 AMPS | / |

| Temperature Range Specifications | |
|---|--|
| Operating Temperature Range | Discharge: -15 ~ +50 (5 ~122 °F) |
| | Charge: -15 ~ +40 (5 ~104 °F) |
| | Storage: -15 ~ +40 (5 ~104 °F) |
| Recommended Operating Temperature Range | +74 °F (23 °C) to +80 °F (27 °C) |
| Self-Discharge | Less than 10% after 90 days, can be stored up to 6 months at 25 (77 °F); Fully recharging is required before usage, For higher temperatures the time interval will be shorter. |

| Charge Voltages | | |
|---|--------------------------------|------------|
| Float Charging Voltage | 13.5 to 13.8 VDC/unit@ (25°C) | |
| Equalization and Cycle Service Charging Voltage | 14.3 to 14.5 VDC/unit @ (25°C) | |
| Maximum Charge Current(A) | 8.8A | |
| Charging Temperature Compensation | Cycle use | -4mV/cell/ |
| | Float use | -3mV/cell/ |

BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

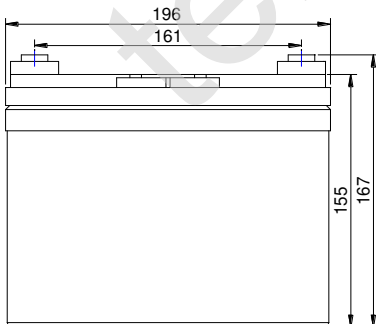

Battery bank spacing required 12.5mm (1/2"inch) minimum

Constant Current Discharge Rating Amperes @ 77 °F (25 °C)


| Cut off voltage V/cell | 15M | 30M | 45M | 1H | 2H | 3H | 5H | 8H | 10H | 12H | 20H |
|------------------------|-----|-----|------|------|------|-----|-----|-----|-----|-----|------|
| 1.75V | 48 | 35 | 26.3 | 20.6 | 10.7 | 7.9 | 5.6 | 3.9 | 3.2 | 2.7 | 1.75 |

Note: The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




DC35-12A DATA SHEET


Terminal Voltage(V) and Discharge Time

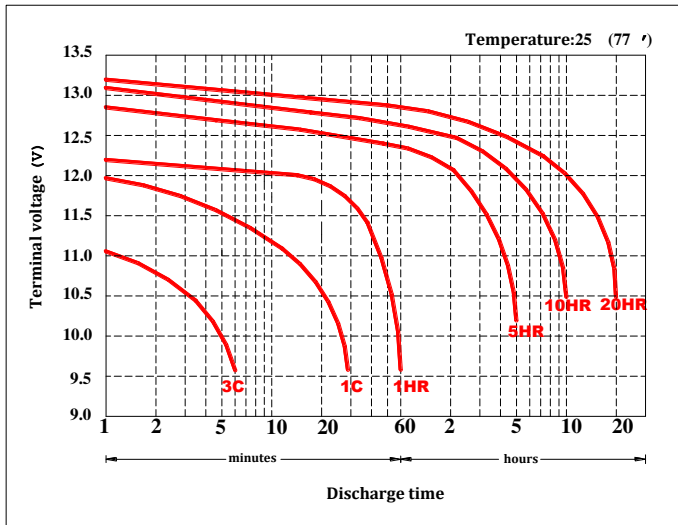


Duration of discharge vs. Discharge current

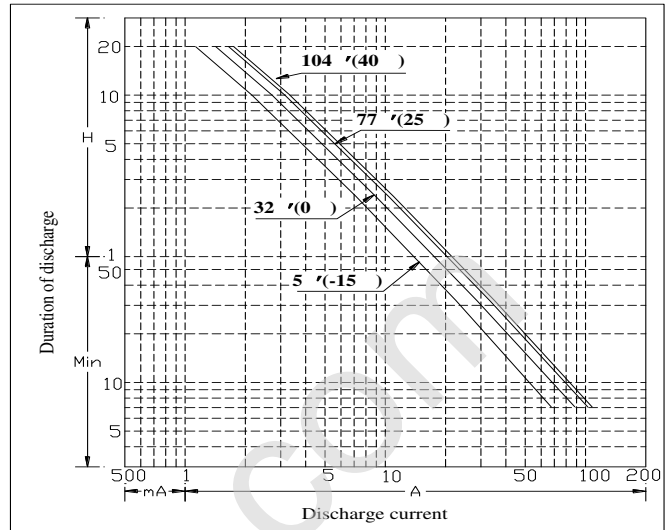


Percent Capacity vs. Temperature

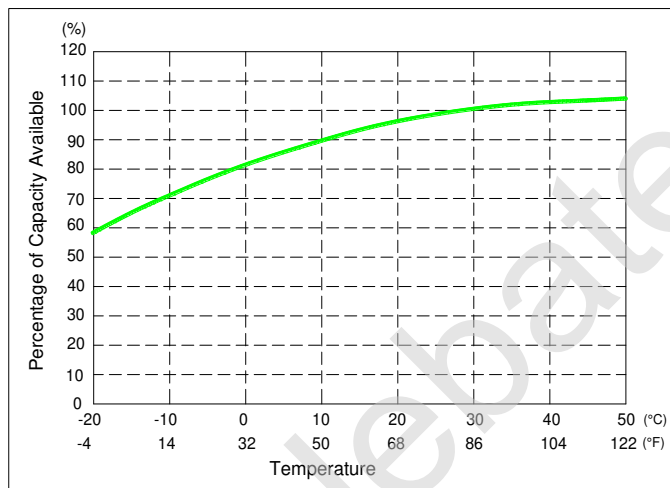

State of Charge(SOC) vs Open Circuit Voltage(OCV)

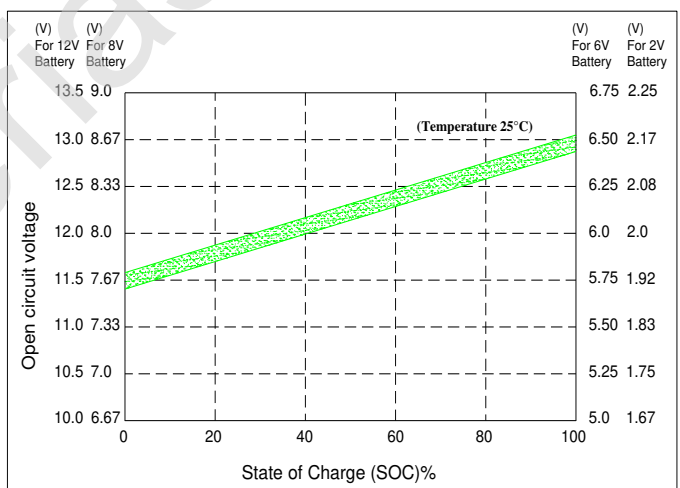

Capacity Retention Characteristic

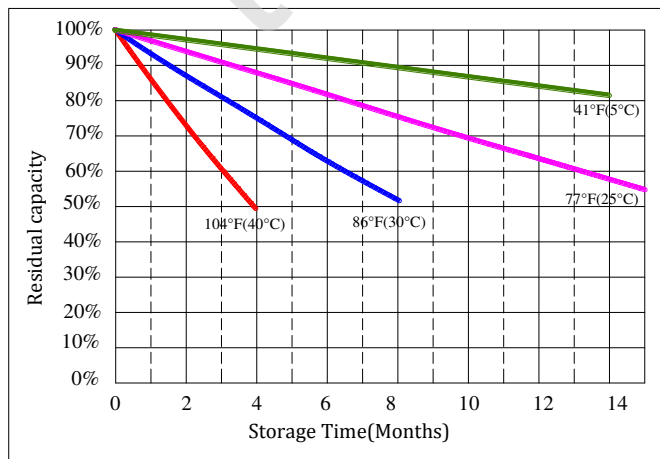

Cycle Life vs. Depth of Discharge(DOD)

