



HC30

SPECIFICATIONS

BATTERY DESIGN

- Absorbent glass mat (AGM) technology 12V battery VRLA
- Can be mounted in any orientation except inverted.
- US DOT and IATA certified non-spillable
- Can be fitted with TP brass automotive adaptor on request.
- Sealed Construction (Non-Spillable Battery)
- Shipped fully charged - just install and go!
- Suited for repeated discharges such as running your vehicle with winches or other electrical accessories.

PERFORMANCE FEATURES

- ✧ PHCA: 950A at 80°F (27°C) for 5 seconds
- ✧ CCA: 450A at 0°F (-18°C)
- ✧ CA/MCA: 550A at 32°F (0°C)
- ✧ HCA: 635A at 80°F (27°C)
- ✧ Reserve capacity: 60minutes
- ✧ Short circuit current: 1550A
- ✧ Operation temperature range: -5°F (-15°C) to 122°F (50°C)

Nominal Dimensions

| Length | | Width | | Height | | Total Height | | Weight | |
|--------|------|-------|------|--------|------|--------------|------|--------|-------|
| mm | in | mm | in | mm | in | mm | in | kg | pound |
| 250±2 | 9.84 | 97±2 | 3.82 | 142±2 | 5.59 | 156±2 | 6.14 | 10.10 | 22.27 |



HIGH RATE DISCHARGE AT 77°F (25°C)

| 5 sec. | 10 sec. | 20 sec. | 30 sec. |
|--------|---------|---------|---------|
| 950A | 850A | 720A | 635A |

EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

| 5min | 15min | 1hr | 3hr | 5hr | 10hr | 20hr |
|------|-------|-------|-------|------|-------|-------|
| 134A | 60.8A | 20.2A | 7.89A | 5.0A | 2.72A | 1.50A |

PHYSICAL CHARACTERISTICS

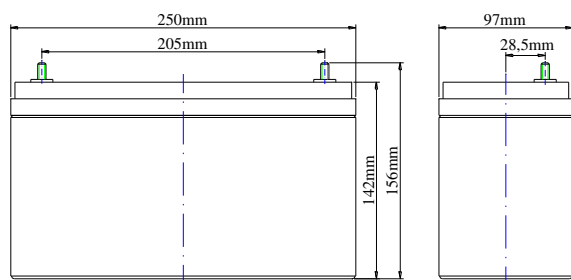

Terminal: M6M

