



ES17-12S

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate (0.9A to 10.50V)	18Ah
10 hour rate (1.71A to 10.50V)	17.1Ah
5 hour rate (3.06A to 10.20V)	15.3Ah
1C (18A to 9.60V)	9.6Ah
3C (54A to 9.60V)	6.3Ah

Weight Approx. 12.89Lbs. (5.86kg)

Internal Resistance (at 1KHz) Approx. 12 mΩ

Maximum Discharge Current for 5 seconds : 270A

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 14.4 to 15.0V
Coefficient -5.0mv / °C / cell
Maximum Charging Current : 5.4A

Standby Use : Float Charging Voltage 13.50 to 13.80V
Coefficient -3.0mv / °C / cell


Case Material : ABS
(Option : UL94 HB Flame Retardant Case Material)

Terminal : F2


Maintenance-Free Rechargeable Sealed Lead-Acid Battery




DIMENSIONS



F2 (Faston Tab 250)

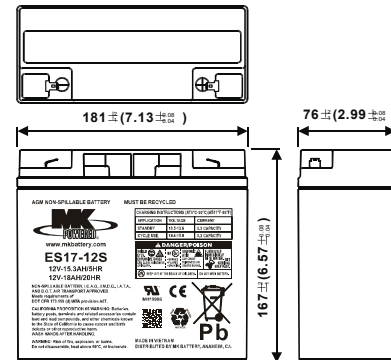

(v) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

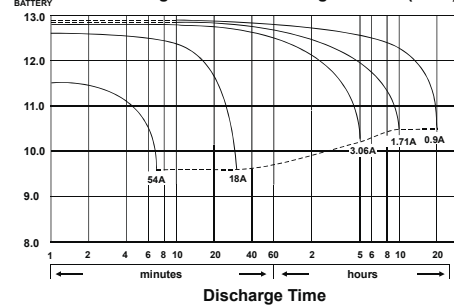

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

