# M24 SLD G FT

## SPECIFICATIONS

**Valve-Regulated, Gelled-Electrolyte Battery**

| | |
|---|---|
| **Nominal Voltage (V)** | 12V |
| **Capacity at C/100** | 84.5 Ah |
| **Capacity at C/20** | 73.6 Ah |
| **Capacity at C/5** | 63 Ah |
| **Weight** | 51.5 lbs. (23 kg) |
| **Plate Alloy** | Lead Calcium |
| **Posts** | Epoxy Seal Threaded Brass Post |
| **Container/Cover** | Polypropylene |
| **Operating Temperature Range** | -76°F (-60°C) - 140°F (60°C) |
| **Charge Voltage @ 77°F (25°C)** | |
| **Cycle** | 13.8 - 14.6 volts |
| **Float** | 13.4 - 13.6 volts |
| **Vent** | Self-sealing |
| **Electrolyte** | Sulfuric acid thixotropic gel |
| **Terminal** | C (Insert w/ 1/4" - 20 round hole) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.




## DIMENSIONS

*Inches (mm)*

| | |
|---|---|
| **Length** | **10.20 (259 mm)** |
| **Width** | **6.80 (173 mm)** |
| **Height** | **8.24 (209 mm)** *Including terminal* |

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F) Based on BCI 2-hour Capacity**

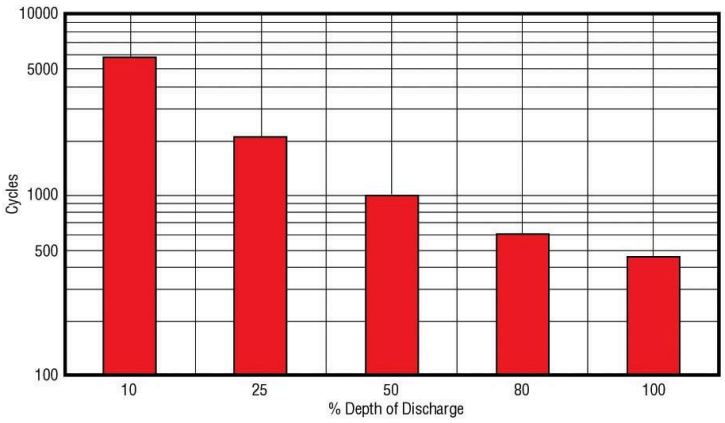


**MK Battery**
1631 South Sinclair Street ● Anaheim, California 92806
Toll Free: 800-372-9253 ● Fax: 714-937-0818 ● E-mail: sales@mkbattery.com

All data subject to change without notice. No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company. ©2017 MK Battery