

MOTIVE T1275-AGM

MODEL	T1275-AGM
VOLTAGE	12
CAPACITY	132Ah @ 20Hr
MATERIAL	Polypropylene
BATTERY	VRLA AGM / Non-Spillable / Maintenance-Free
COLOR	Maroon
WATERING	No Watering Required



12 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	TERMINAL TYPE ^G	DIMENSIONS ^c INCHES (mm)			WEIGHT ' LBS. (kg)	HANDLES	INSTALLATION ORIENTATION
			LENGTH	WIDTH	HEIGHT ^F			Horizontal
GC12	T1275-AGM	M8/AP/LT	12.96 (329)	7.06 (179)	10.96 (278)	83 (38)	Embedded	and Vertical

ELECTRICAL SPECIFICATIONS

VOLTAGE	Cranking P	Cranking Performance		^A Minutes	CAPACITY ^B AMP-HOURS (Ah)		ENERGY (kWh)	INTERNAL RESISTANCE (m Ω)	SHORT CIRCUIT CURRENT (amps)		
10	C.C.A. ^D @0°F	C.A. ^E @32°F	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	4.9	2920
12	-	-	254	70	114	126	132	135	1.62	4.3	2920

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)					
SYSTEM VOLTAGE	12V 24V 36V			48V	
Maximum Charge Current (A)	20% of C ₂₀				
Absorption Voltage (2.40 V/cell)	14.40	28.80	43.20	57.60	
Float Voltage (2.25 V/cell)	13.50	27.00	40.50	54.00	

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT				
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F				
OPERATIONAL DATA					

OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 122°F (-20°C to 50°C) At temperatures below 32°F (0°C) maintain a state of charge greater than 60%	Less than 3% per month depending on storage temperature conditions

RECYCLE RESPONSIBLY





STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	CELL	12 VOLT
100	2.14	12.84
75	2.09	12.54
50	2.04	12.24
25	1.99	11.94
0	1.94	11.64




BATTERY DIMENSIONS (shown with M8)

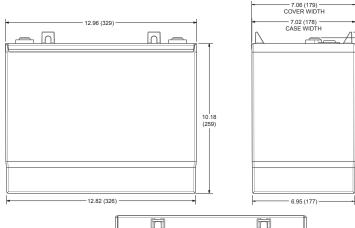



TERMINAL CONFIGURATIONS⁶

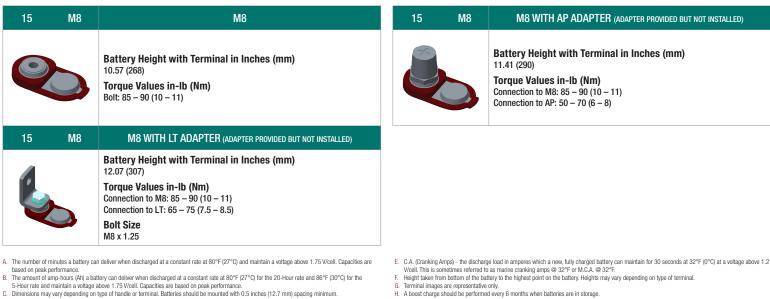

10.96 (278)

10.57 (268)

- Vice II this is sometimes referred to as manine cranking amps (a) young due to due to a manine in the second at a 2 Vice III this is sometimes referred to as manine cranking amps (a) 22 r o M (C.A. (a) 32 r). Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal. Terminal images are representative only. F
- G.
- A boost charge should be performed every 6 months when batteries are in storage. Η.
- Weight may vary.
- C.C.A. (Cold Cranking Amps) the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell. Battery Counci



Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.



С

D

800.423.6569 / +1.562.236.3000 / trojanbattery.com

© 2020 Trojan Battery Company, LLC. All rights reserved. Trojan Battery Company is not liable for damages that may result from any information provided in or omitted from this publication, under any circumstances. Trojan Battery Company reserves the right to make adjustments to this publication at any time, without notice or obligation.

T1275-AGM_DS_092120

PERCENT CAPACITY VS. TEMPERATURE 140 60 120 50 40 100 30 80 Temperature (F) 20 60 Temperature 10 40 0 20 -10 0 -20 -20 -30 -40 -40 20% 40% 609 809 100% 120% 0% Percent of Available Capacity

SELF DISCHARGE VS. TIME[#]

